



**TME AIPHONE IX-DA**

**TME AIPHONE IX-BA**

## TME AIPHONE IP Intercom

**EMBEDDABLE WITH TME PARKING KIOSK AND PAYMENT MACHINE**

The AIPHONE IX-DA is a surface mount IP addressable video parking intercom station. The AIPHONE IX-BA is a surface mount IP addressable audio only parking intercom station.

Both units are weather resistant. They connect to the network using CAT-5e/6 cable. The IX-DA unit is equipped with a fixed camera with vertical angle adjustment. The IX-DA is ONVIF Profile S compliant. The parking intercom stations can call up to 20 different master stations (IX-MV or instances of IX Mobile). An additional 20 master stations can be called using the contact input.

The speaker and microphone allow for two-way communication with a master station or the IX Mobile App. The 600 ohm output can be used for paging announcements or to run audio to an external speaker/horn. The units are 802.3af PoE compliant. Both TME AIPHONE IX-DA & IX-BA support one-touch button for emergency calling for parking industry.



**Two-Way Audio**



**Realtime Video**




**One-touch Emergency**



**Up to 20 Different Stations**





# SYSTEM DIAGRAM : TME AIPHONE IP Intercom

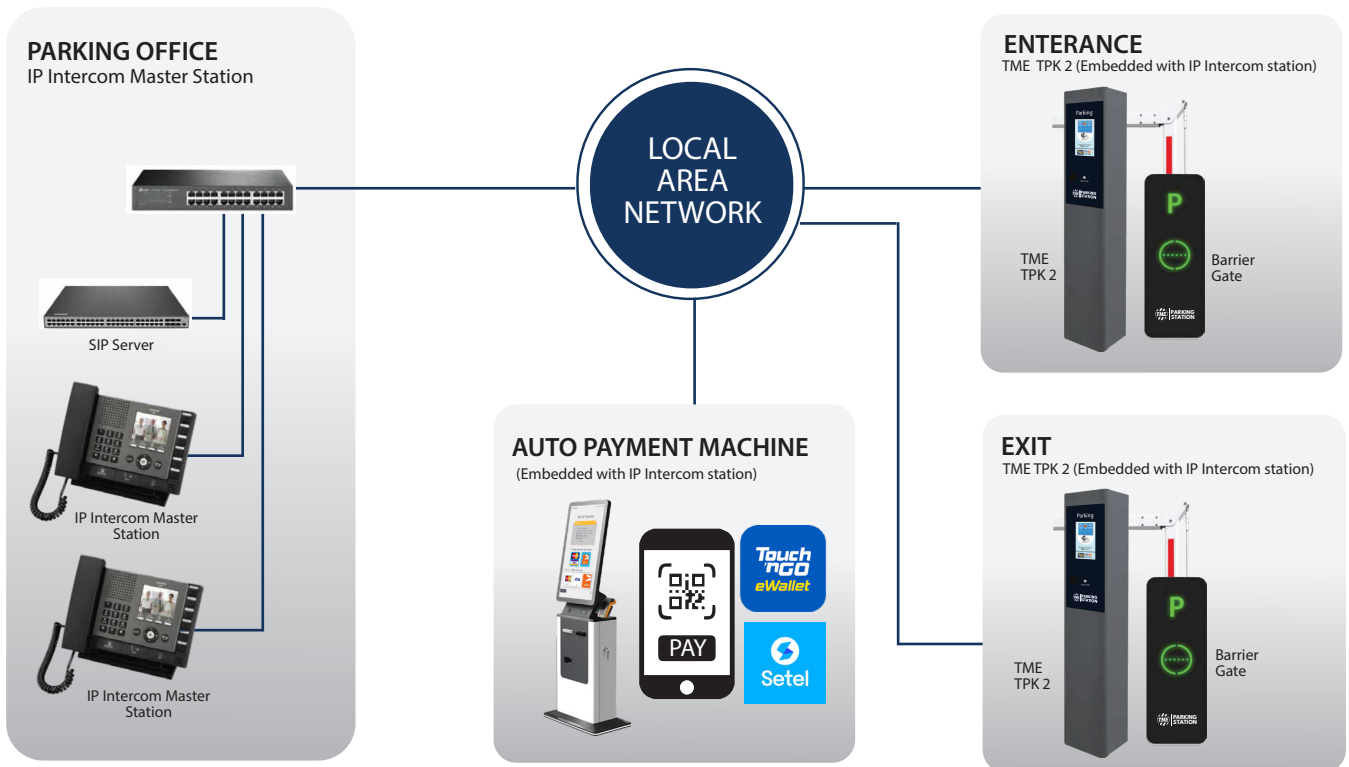

## SPECIFICATIONS



Power Source	802.3af PoE compliant
Communication	Open voice hands-free
Camera	1/4" color CMOS VGA
Min. illumination	5 Lux
Wiring	CAT-5e or CAT-6
Wiring distance	330'
Door release	24V AC/DC, 500mA (N/O, COM, N/C)
Audio	out 600, 300mV RMS
Operating Temp	-40° - 140°F (-40° - 60°C)
Ingress Protection	IP55
Dimensions	5-1/16"H x 3-13/16"W x 1-5/8"D

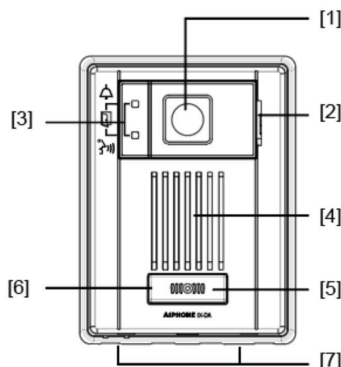

- [1] Camera
- [2] Microphone
- [3] Status LED's
- [4] Speaker
- [5] Call button
- [6] White LED (for night viewing)
- [7] Water escape holes (do not obstruct)

